

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

3
alg
8/22

In re Patent Application of

WILLIAMS et al.

Atty. Ref.: 922-119

Serial No. 09/750,783

Group: 2631

Filed: January 2, 2001

Examiner:



DUAL PURPOSE SPREAD SPECTRUM RADIO
RECEIVERS WITH CONTROLLED FREQUENCY
REJECTION

RECEIVED

AUG 20 2001

* * * * *

Technology Center 2600

August 16, 2001

Assistant Commissioner for Patents
Washington, DC 20231

SUBMISSION OF PRIORITY DOCUMENTS

Sir:

It is respectfully requested that this application be given the benefit of the foreign filing date under the provisions of 35 U.S.C. §119 of the following, a certified copy of which is submitted herewith:

Application No.

Country of Origin

Filed

0027631.1

GREAT BRITAIN

11 November 2000

Respectfully submitted,

NIXON & VANDERHYE P.C.

By:

Larry S. Nixon
Reg. No. 25,640

LSN:vc
1100 North Glebe Road, 8th Floor
Arlington, VA 22201-4714
Telephone: (703) 816-4000
Facsimile: (703) 816-4100

THIS PAGE BLANK (USPTO)



4552
09/750,783



INVESTOR IN PEOPLE



RECEIVED
AUG 20 2001
Technology Center 2600

The Patent Office
Concept House
Cardiff Road
Newport
South Wales
NP10 8QQ

The undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation and Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents originally filed in connection with the patent application identified therein together with the statement of inventorship and of right to grant of a Patent (Form 7/77), which was subsequently filed.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in the certificate and any accompanying documents has re-registered under the Companies Act 1985 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in the certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., p.l.c. or PLC.

Registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

Signed


W. Evans

Dated 9 January 2001

**CERTIFIED COPY OF
PRIORITY DOCUMENT**

THIS PAGE BLANK (USPTO)

13NOV00 E583207-1 002536
P01/7700 0.00-0027631.1

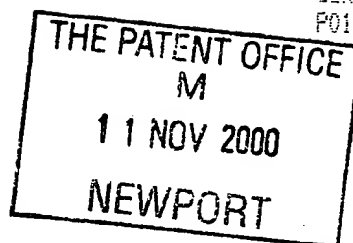

Patents Form No. 1/77

The Comptroller
The Patent Office
Cardiff Road
Newport
Gwent NP10 8QQ

REQUEST FOR THE GRANT OF A PATENT

The grant of a patent is requested by the undersigned on the basis of the present application:

1. Title of the invention: DUAL PURPOSE SPREAD SPECTRUM RADIO RECEIVERS
WITH CONTROLLED FREQUENCY REJECTION

2. Applicants details: **0027631.1** **11 NOV 2000**

First or only applicant: 3Com Corporation

Country: USA State: Delaware

Address: 5400 Bayfront Plaza
Santa Clara
California 95052-8145
United States of America

7691009001

3. Name of agent: BOWLES HORTON ADP Code: 8805003 ✓

Agent's address: Felden House, Dower Mews
High Street, Berkhamsted
Hertfordshire HP4 2BL

4. Agent's reference: 105335

5. The application claims an earlier date under any of Sections 8(3), 12(6), 15(4) or 37(4): NO

6. Declaration of Priority (if any)

Country
NONE

Application Number

Priority date

Patents Form 1/77 (continued)

7. Inventorship

The applicant(s) is/are the sole inventor or joint inventors: NO

8. Check List of Documents:


A. The application is accompanied by the following number of sheets:

Request: 1
Description: 9 ✓ *W*
Claims: 1 ✓
Abstract: 1 ✓
Drawings 3+3 ✓ (x2)

B. The application as filed is accompanied by the following:


Patents Form 7/77: NO
Patents Form 9/77: YES ✓
Patents Form 10/77: YES ✓
Priority Document: NO
Translation of priority document: NO

9 Signature

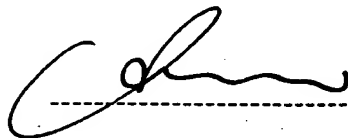 _____ for BOWLES HORTON

Patents Form No. 7/77

The Comptroller
The Patent Office
Cardiff Road
Newport
Gwent NO10 8QQ



STATEMENT OF INVENTORSHIP AND OF RIGHT TO THE GRANT OF A PATENT

Patent application No. 0027631.1,

Title: DUAL PURPOSE SPREAD SPECTRUM RADIO RECEIVERS WITH
CONTROLLED FREQUENCY REJECTION

I/We: 3Com Corporation


the applicants in respect of the above-mentioned application for a patent declare as follows:

(i) I/We believe that the person(s) whose name(s) and address(es) are stated on the reverse side of this form is/are the inventor(s) of the invention in respect of which the patent application is made;

(ii) the derivation of my/our right to be granted a patent upon the said application is as follows:

by virtue of the terms of employment of the inventors

(iii) I/We consent to the publication of the details contained herein to each of the inventors named on the reverse side of this form

Signature  23 November 2000
for BOWLES HORTON (Authorised Agents)

Telephone: 01442 875961

Our reference: 105335

WILLIAMS, Stephen Akira
29 Kellett Road
Southampton
Hampshire
SO15 7PS/GB

7926058001

KNOWLES, Andrew
11 Mayfair Gardens
Southampton
Hampshire/GB

8030755001

DUAL PURPOSE SPREAD SPECTRUM RADIO RECEIVERS WITH CONTROLLED FREQUENCY REJECTION

Field of the Invention

5 This invention relates to spread spectrum radio receivers and particularly which include two receiving channels for the respective reception, despreading and demodulation of signals coded by a respective spread spectrum technique. The invention is particularly though not exclusively intended for use in radio receivers which incorporate units that can form part of
10 a packet-based data communication system and have a facility for communicating with other units in the system over a wireless link.

More particularly the invention relates to a system in which a receiver for a first spread spectrum system is in close proximity with a transmitter or receiver or, more usually, a
15 transceiver capable of both transmission and reception for a second spread spectrum system of which the spread spectrum includes frequency-hopped components that fall partly or wholly within the spread spectrum of the first system.

Background to the Invention

20 Spread spectrum techniques for the transmission and reception of signals, particularly in wireless transmission, has been established for many years. A general description of such systems is given, for example in 'Spread Spectrum Systems', by Robert C Dixon, published by John Wiley and Sons (Second Edition, 1984). Spread spectrum techniques have proved
25 versatile and effective in discriminating against both broadband noise and specific interfering signals, since the correlation process (otherwise called despreading) in accordance with the original spreading will spread an interfering signal and thereby reduce the amplitude of its frequency components relative to the components of the desired and despread signal.

Nevertheless, spread spectrum receivers are not proof against interference and where there is a strong interfering signal within the effective bandwidth of the spread spectrum signal, a substantial error rate is likely. The effects of a single interfering signal can to some extent be countered by employing redundancy in the transmitted signal, though that is not a desirable solution in general except possibly for systems where a high degree of security at the cost of a lower effective information rate is desirable.

There are three general techniques for producing spread spectrum signalling, namely the modulation of a carrier by a digital code sequence, known as 'direct sequence' modulation; the sweeping of a carrier over a wideband during a given pulse interval, often called 'chirp' modulation, and carrier frequency shifting in discrete increments in a pattern dictated by a code sequence, usually termed 'frequency-hopping'. The present invention relates to systems which include a receiver for a first spread spectrum system (particularly a 'direct sequence' system) and apparatus, which may be a transmitter or receiver or transceiver, which can transmit and/or receive a frequency-hopped spread spectrum signal that for at least part of the time is within the spread spectrum of the signal intended for reception by the first receiver.

In a pertinent example to which the invention relates, a radio receiving apparatus may include a first receiver (which may form part of a transceiver) which is intended to receive a spread spectrum signal produced in accordance with IEEE Standard 802.11b. The apparatus also includes either a transmitter or receiver (and more usually both) which operates according to a frequency-hopped spread spectrum system, for example that which is commercially termed a 'Bluetooth' system.

A receiver of this nature is provided in order to be able to communicate with devices operating with two different spread spectrum transmission standards.

In this particular example, the Standard prescribed by IEEE 802.11b specifies a spread spectrum transmission that effectively occupies a bandwidth of 22 MHz within the range

2400 to 2480 MHz. The 'Bluetooth' transmission is a frequency-hopped transmission which occupies a 1 MHz band for a short period of time before being frequency-hopped. The total allocated bandwidth is of the order of 80 MHz. The usable spectrum of a 802.11b signal only employs 22 MHz of this bandwidth. However, the 'Bluetooth' signal will hop in
5 to the same frequency band as the 802.11b signal about one quarter of the time.

The 802.11b receiver will accept the corresponding spread spectrum signal and despreads it to recover the original signal. During this process, any narrow band interfering signal will be spread out and the interference is reduced in level. In normal operation, the ratio E_s/N_0 ,
10 where E_s is the energy per signal and N_0 is the normalised noise, is about 8 decibels for an 11 Mbps data rate. If the noise (represented by the 'Bluetooth' signal while it is within the bandwidth of the 802.11b spread spectrum signal) is more than 8dB above the 802.11b spread signal, as may well be expected, then considerable interference will be experienced.

15 The present invention is therefore concerned with the reduction of interference in a spread spectrum transmission wherein the interference arises from a frequency-hopped signal which is received or transmitted locally.

Summary of the Invention

20 The present invention particularly concerns a radio receiving apparatus which comprises a receiver for a first spread spectrum radio signal and includes means for receiving, and despreads the first spread spectrum signal and also comprises a sequence generator for controlling the generation of a frequency-hopped signal for spreading or despreads a
25 second spread spectrum signal. In the particular circumstances previously described and similar circumstances wherein the frequency-hopped signal comprises a sequence of fundamental components within the effective band of the first spread spectrum, the receiver for the first spread spectrum signal includes according to the invention a programmable rejection filter acting on the first spread spectrum signal before that signal is despread. The

filter is preferably controlled by the sequence generator to provide rejection of frequency components corresponding to those in the frequency-hopped spread spectrum signal.

5 The programmable rejection filter may be disposed within an intermediate frequency section of the receiver for the first spread spectrum radio signal. The sequence generator will either determine the sequence of carrier frequencies and the switching intervals between them in a transmitted frequency-hopped signal or determine corresponding frequencies (which may be the same frequencies or related frequencies in a different frequency band) for a receiver. In any event the sequence generator will determine the frequency-hopped signal and therefore
10 can be used to determine a set of frequencies which correspond to the relevant components in the radio frequency signal or, for example, corresponding components in an intermediate frequency version thereof. Thus the programmable filter can be controlled to provide specific rejection of components which correspond, having regard to any frequency changing within the first receiver, to the frequency hopped carrier in the second spread
15 spectrum signal.

If the sequence generator is that employed in a receiver for the frequency-hopped spread spectrum signal, then the rejection provided by the programmable filter will not be effective until the frequency-hopped spread spectrum receiver is properly synchronised or correlated
20 with the spread spectrum signal that it should receive.

Further objects and features of the invention will be apparent from the accompanying drawings.

25 **Brief Description of the Drawings**

Figure 1 illustrates a first embodiment of the invention;

Figure 2 illustrates a second embodiment of the invention; and

30 Figure 3 illustrates a third embodiment of the invention.

Detailed Description

Figure 1 of the drawings illustrates part of a dual-purpose apparatus which can receive, despread and ultimately demodulate spread spectrum signals according to two standards, first a 'direct-sequence' spread spectrum signal conforming to IEEE Standard 802.11b and secondly a frequency-hopped spread spectrum signal conforming to the Bluetooth 1.0 specification. Figure 2 of the drawings illustrates a different combination of features from such a transceiver, showing the same receiver (10) for the first spread spectrum and a transmitter (50) for a frequency-hopped spread spectrum signal. It will be understood that in practice the apparatus in order to be fully functional for both systems would contain both a transmitter and a receiver for each of the spread spectrum systems but the invention may be embodied in a device having only receivers for both systems, as shown in Figure 1 or even a receiver for one system and only a transmitter for another, as shown in Figure 2.

The receiver 10 in Figure 1 is, as previously mentioned, intended for a spread spectrum signal conforming to IEEE Standard 802.11b. Signals received at an antenna are bandpass filtered (the bandwidth extending from 2400 to 2480 MHz). The bandwidth limited signal is amplified in linear amplifier 13 and subject to further bandpass filtering in bandpass filter 14. The spread spectrum signal is converted to an intermediate frequency band by means of a first mixer 15 and a local oscillator having a frequency within the range 2050 to 2130 MHz. The intermediate frequency band of the down converted input signal is of the order of 350 MHz.

In this embodiment of the invention the intermediate frequency signal is subject to a programmable rejection filter 17 controlled in a manner to be described later. For the sake of completeness however the operation of the remainder of the receiver will be described first.

The intermediate frequency signal is bandpass filtered in filter 18 and subject to automatic gain control by variable gain intermediate frequency amplifiers 19 and 20. The intermediate

frequency signal thereby obtained is input to a mixer 21. coupled to a second local oscillator 22. The mixer may be a double balanced mixer producing in-phase and quadrature outputs I and Q which are fed out on lines 23 to further processing stages (including a baseband processor) which will be described with reference to Figure 3 by means of which the original signal is recovered in a manner well known in itself. With the exception of the programmable filter 17 the receiver just described is known in the art.

In systems other than, for example, those conforming to IEEE 802.11b, the mixer 21 could be a correlative mixer which provides despreading.

Figure 1 also includes a 'Bluetooth' receiver 30 for a frequency-hopped spread spectrum signal. A signal received at an antenna 31 (which may be the same as antenna 11 or separate from it), is bandpass filtered in filter 32, amplified in linear amplifier 33, subject to further bandpass filtration in bandpass filter 34 and coupled to a first mixer 35. This mixer is a correlative or despreading mixer which is coupled to the output of a frequency-hopping synthesiser 36, which in normal operation produces a sequence of frequency-hopped radio frequency signals corresponding to the frequency-hopped sequence of carrier signals which were used to spread the spectrum of the original information bearing signal at the transmitter. The down converted input signal is subject to bandpass filtration in filter 37 and is fed through amplifier stages 38 and 39 to a demodulator 40. This demodulator 40 provides baseband input signals to a baseband processor 41 which includes, as is usual, a sequence generator SG that determines the hop rate and the sequence of signals to be produced by the frequency-hopping synthesiser. In normal operation the synthesiser has to be synchronised to the frequency-hopping sequence in the receive signal. Methods of synchronisation are well established, as discussed for example in standard textbooks such as Dixon, previously cited. In any event receiver 30 is intended to conform to an ordinary receiver according to the Bluetooth 1.0 standard. It is sufficient to note that such a receiver 30 includes a sequence generator (SG) which in normal operation will be synchronised to the received frequency-hopping sequence and will produce on output lines 42 and 43 data

which identifies the frequencies in the frequency-hopping sequence and data which determines the duration and timing of the hops in the sequence.

5 In the embodiment shown in Figure 1, the signals on lines 42 and 43 operate a notch controller 44 which may be an analogue to digital converter that controls the notch filter 17 so that for a given frequency produced by the synthesiser 36 a corresponding centre frequency is selected for the filter 17. By 'corresponding' in this particular case is meant the intermediate frequency to which the radio frequency corresponding to that produced by the synthesiser will be converted by the first mixer 15 in the receiver 10.

10 Thus the programmable filter 17 is stepped through a sequence to reject at each hop an intermediate frequency corresponding to that component in the frequency-hopped spread spectrum signal which is interfering with the first spread spectrum signal.

15 It would be possible to dispose the programmable filter elsewhere in the receiver 10, for example after an analogue to digital conversion stage as shown in Figure 3 or, theoretically, prior to the conversion to an intermediate band. However, it is preferable to dispose the rejection filter in the intermediate stage or subsequently, provided that it is disposed prior to correlative despreading of the spread spectrum signal.

20 Although the despreading of the spread spectrum signal in receiver 10 inherently provides discrimination against noise in general and also specific interfering signals in particular, because such signals are spread because they lack correlation with the spread spectrum signal which the receiver 10 is designed to receive, the gain achieved by despreading may only be of the order of eight decibels and therefore a strong signal, such as will be provided
25 by a receiver 30 in close proximity with receiver 10 may still produce substantial interference which the programmable filter 17 is designed to reduce. Typically, the filter 17 may provide 20dB attenuation at the (selectable) notch frequency.

The filter 17 may be constructed, in a manner known per se, of varactor diodes which are controllable to provide, in circuit with passive components, a variable 'notch' frequency which can be shifted at the comparatively slow rates which are characteristic of frequency-hopped spread spectrum signals.

Figure 2 illustrates a different arrangement in which the receiver 10 is controlled by a sequence generator for a spread spectrum frequency-hopped transmitter 50. As previously indicated, the apparatus will normally include both a transmitter and receiver, which may share some common components, for a frequency-hopped spread spectrum communication system.

Transmitter 50 in Figure 2 is intended to be in standard form and includes a baseband processor 51, which provides for modulation of an information bearing signal on to a carrier signal which is filtered by low-pass filter 55. A frequency-hopped signal is generated by a voltage-controlled oscillator 56 controlled by a frequency-hopping synthesiser which is controlled by outputs 52 and 53 from baseband processor 51 in a manner corresponding to the control of synthesiser 56 but outputs 42 and 43 in Figure 1. The output of oscillator 56 is modulated in a mixer 57 by the output of filter 55, and is fed through a power amplifier 58 and a bandpass filter 59 that limits the output frequencies to the range 2400 to 2480 MHz.

As in the embodiment previously described, the receiver 10 includes a notch filter 17 controlled by a notch controller 44 by the outputs 52 and 53 that represent the code sequence and timing and the control of notch filter corresponds to that previously described with reference to Figure 1.

However, the system shown in Figure 2 may be easier in practice to operate because acquisition of synchronisation is no longer necessary.

It is mentioned in the foregoing that the 'Bluetooth' signal is within the band occupied by the 802.11b signal for only approximately a quarter of the time, specifically for twenty-two

intervals out of the seventy-nine intervals. When the programmable filter is not required by the frequency-hopping code sequence to provide rejection of a component corresponding to one in the frequency-hopped spread spectrum signal, it may be switched to a bypass mode in which it provides no attenuation or be switched to a frequency which is outside the range of interest.

Figure 3 illustrates an embodiment in which a digital notch filter is disposed in the receiver 30 after the I and Q signals from mixer 21 have been converted to digital form and at a stage subsequent to the IF stage but before despreading.

Figure 3 illustrates for the most part the stages of a receiver conforming to IEEE 802.11b following the mixer 21. The I and Q signals on lines 23 are subject to analog to digital conversion in ADC 61.

The digital signals are subject to digital filtration by filters 62, which reject in sequence the frequencies corresponding to the interfering components of the frequency-hopped signal. The filters 62 are controlled by the sequence generator 63, which may be the sequence generator SG in either Figure 1 or Figure 2.

Thereafter the filtered spread spectrum signal is fed to digital correlator 64 controlled by a direct sequence generator 65 to provide a despread signal to a baseband processor 66 in known form.

Claims

1. A radio receiving system comprising a receiver for a first spread spectrum radio signal and including means for receiving and despreading said first spread spectrum signal; and a sequence generator for controlling the generation of a frequency-hopped signal for spreading or despreading a second spread spectrum signal; wherein the receiver for the first spread spectrum signal includes a programmable rejection filter for the first spread spectrum signal before that signal is despread and is controlled by the sequence generator to provide selective attenuation of frequency components which correspond to components in the frequency-hopped signal and are within the bandwidth of the first spread spectrum signal.

2. A system according to claim 1 wherein the receiver includes a mixer for the conversion of the first spread spectrum signal to an intermediate frequency band and the programmable filter provides rejection frequency components that have been converted to frequencies within said intermediate frequency band

3. A system according to claim 1 wherein the receiver includes means for down-converting the first spread spectrum signal to I and Q signals in a low-frequency band and means for converting said I and Q signals to digital signals and wherein said filter comprises digital filters for the said digital signals.

4. A system according to any foregoing claim wherein the system includes a receiver for the second spread spectrum signal and the sequence generator is coupled to a frequency-hopping synthesiser for said receiver.

5. A system according to any of claims 1 to 3 wherein the system includes a transmitter for the second spread spectrum signal and the sequence generator is coupled to a frequency-hopping synthesiser for said transmitter.

Abstract

5

A receiver for a direct sequence spread spectrum signal subject to interference from a locally transmitted or received frequency-hopped spread spectrum signal includes a programmable notch filter which is controlled in accordance with the code sequence of a frequency-hopped signal to reject frequencies corresponding to those producing

10

interference.

THIS PAGE BLANK (USPTO)

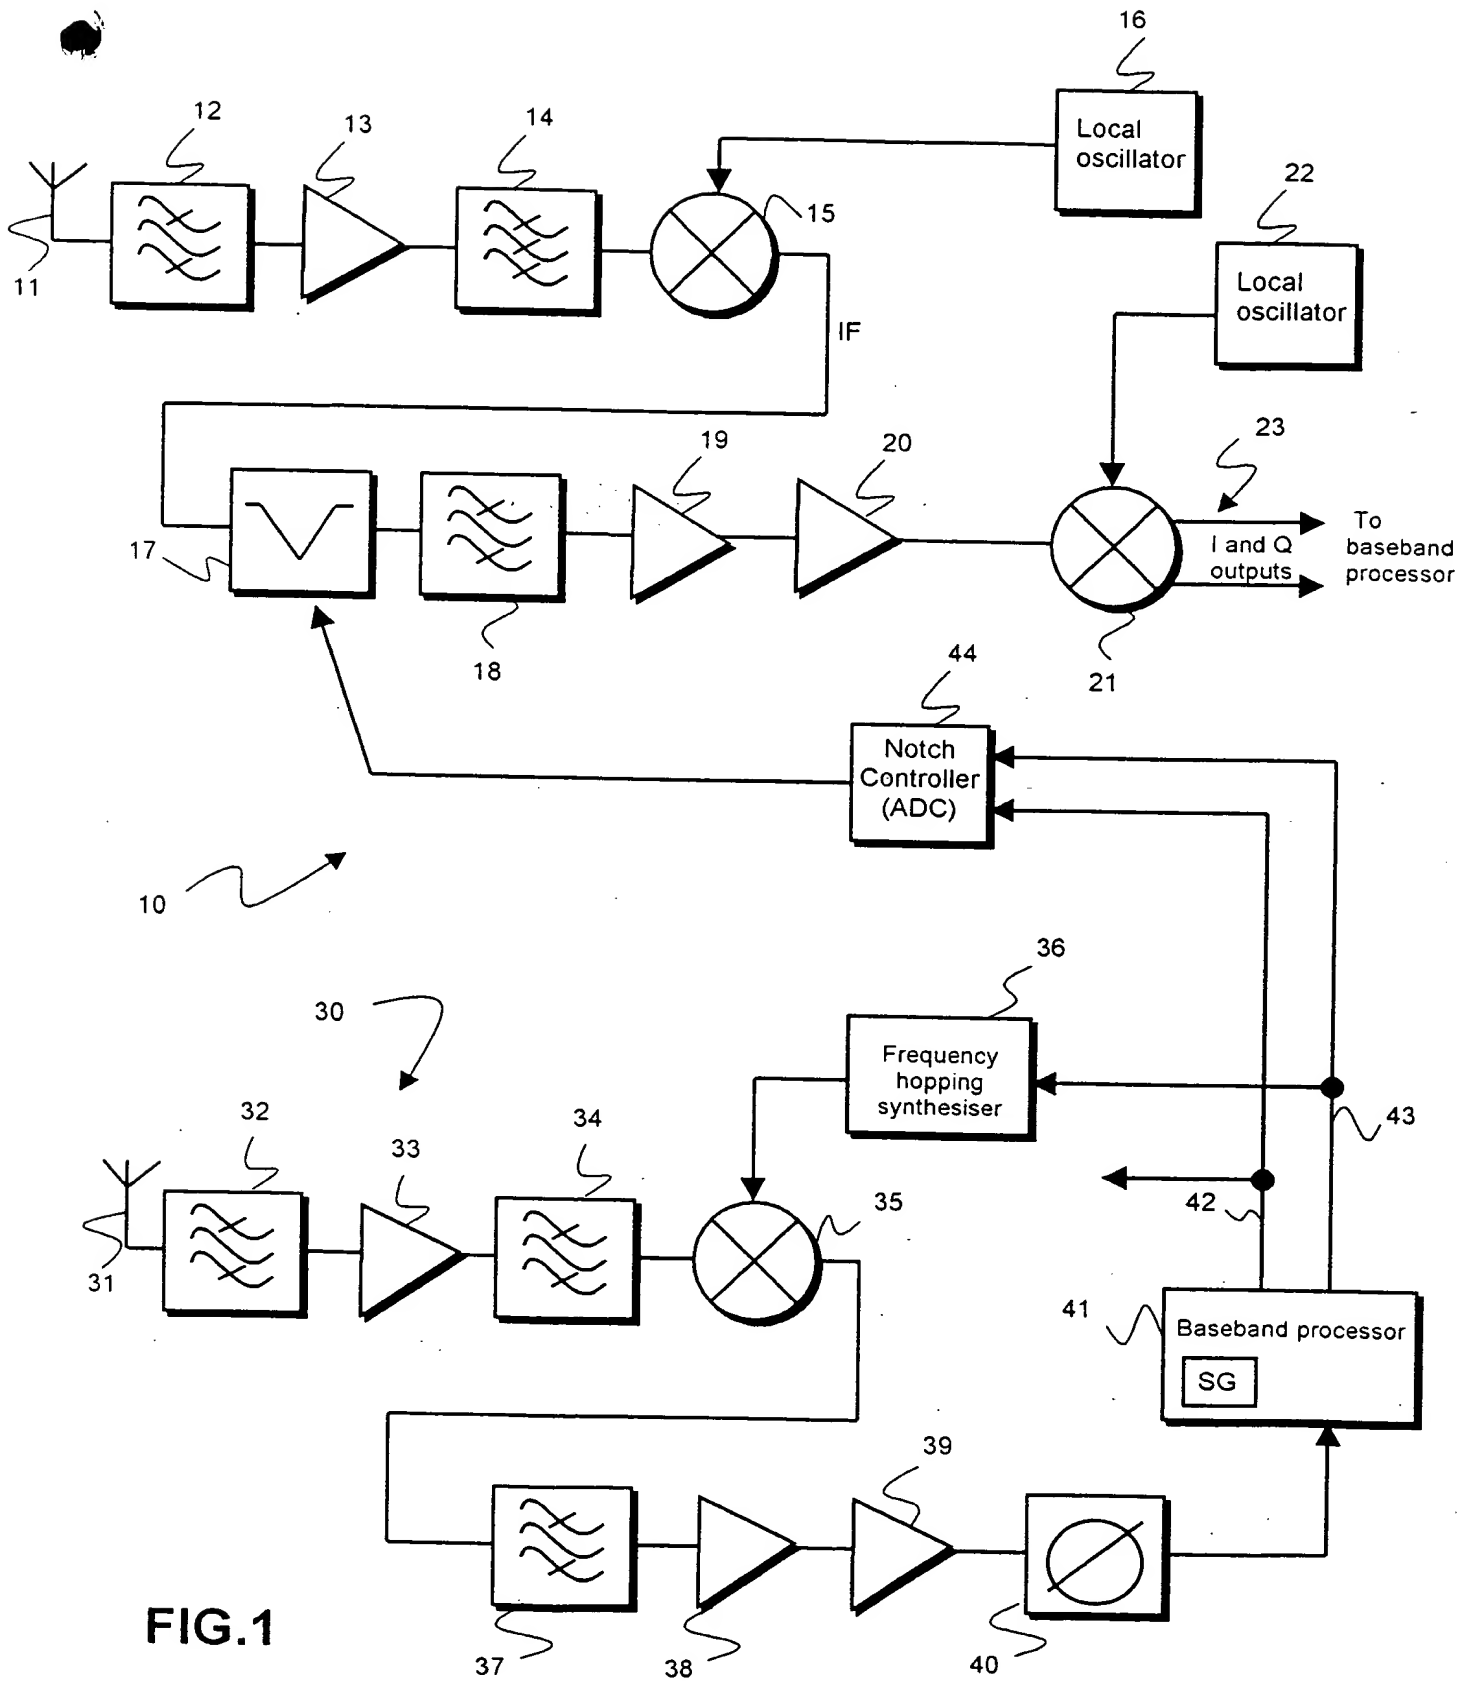


FIG.1

HIS PAGE BLANK (USPTO)

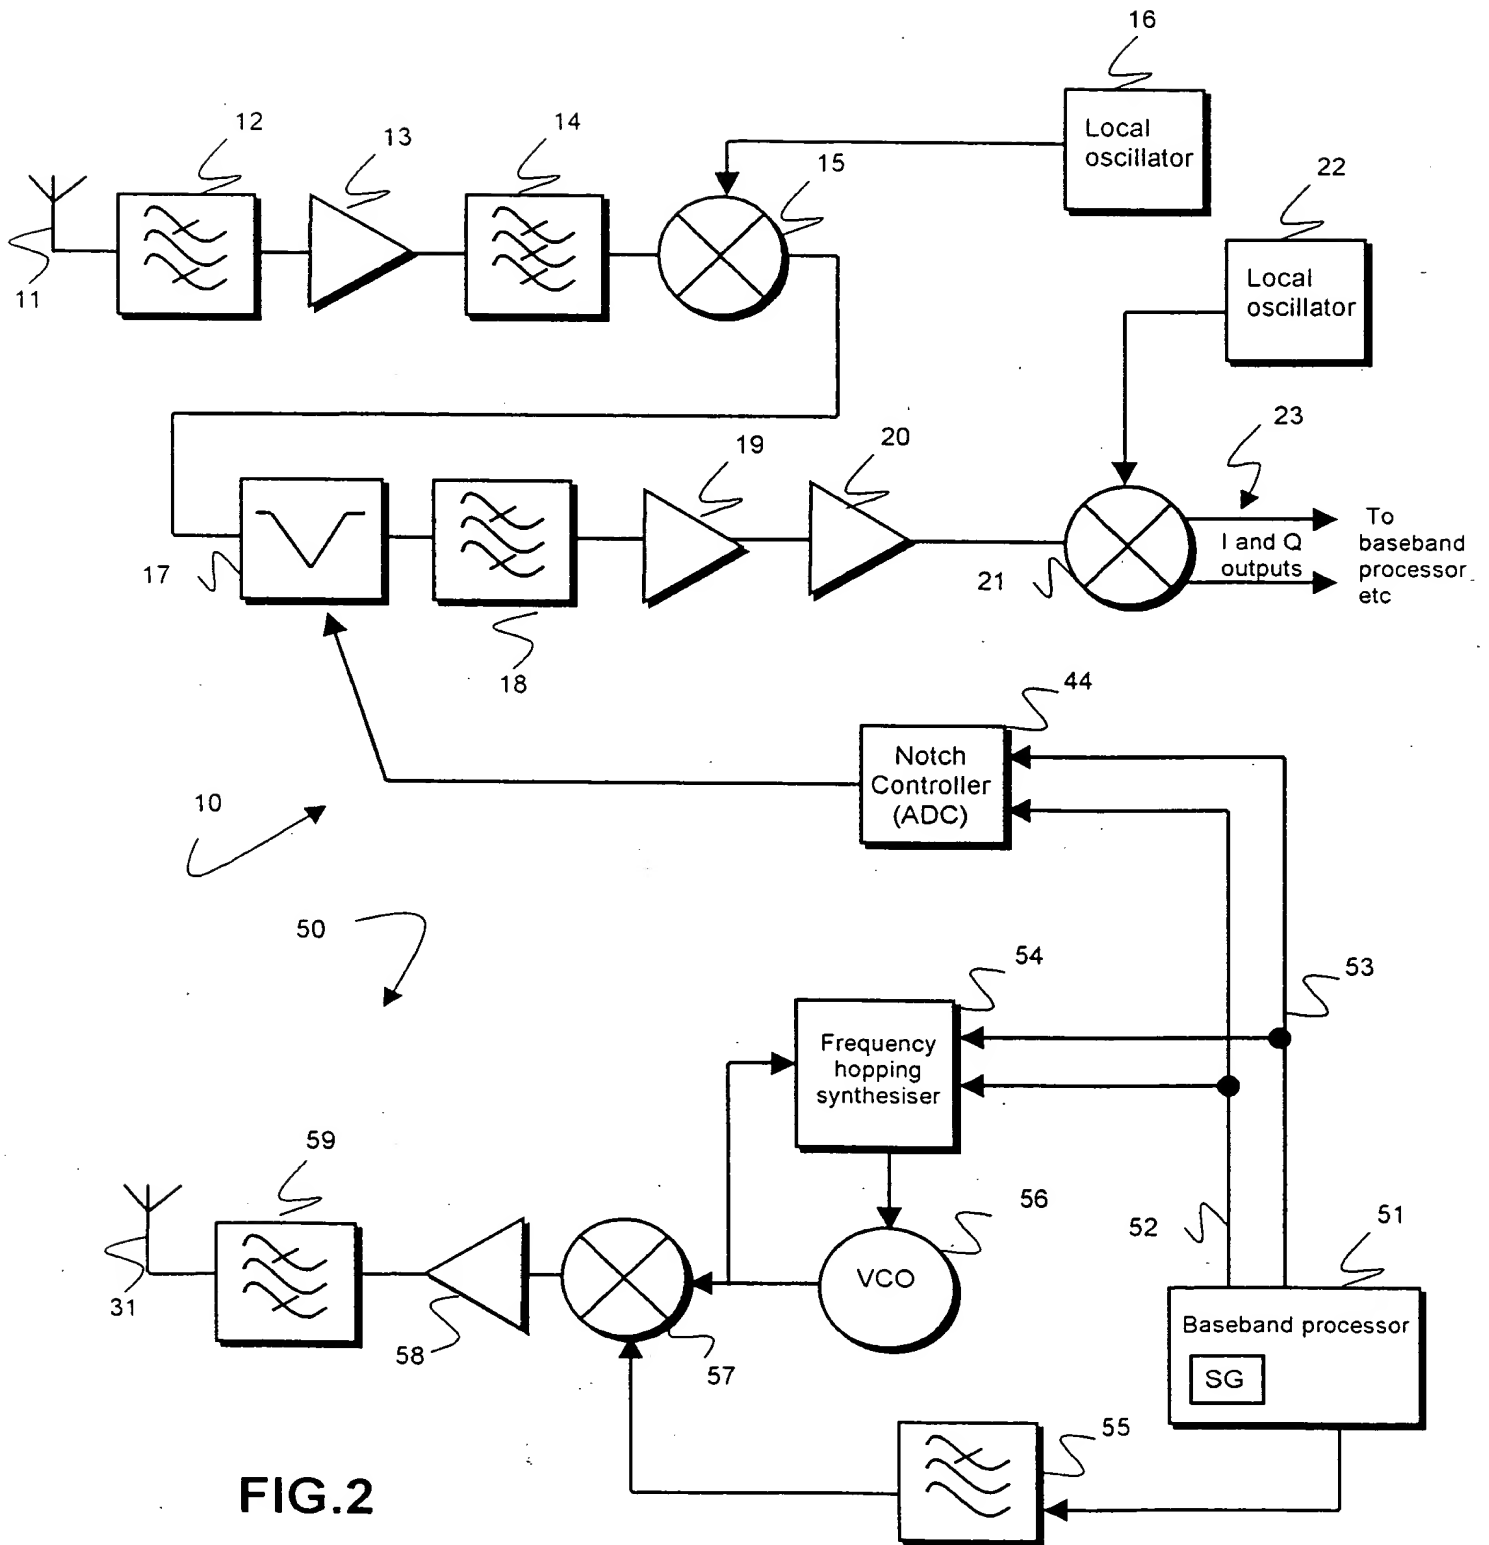


FIG. 2

THIS PAGE BLANK (USPTO)

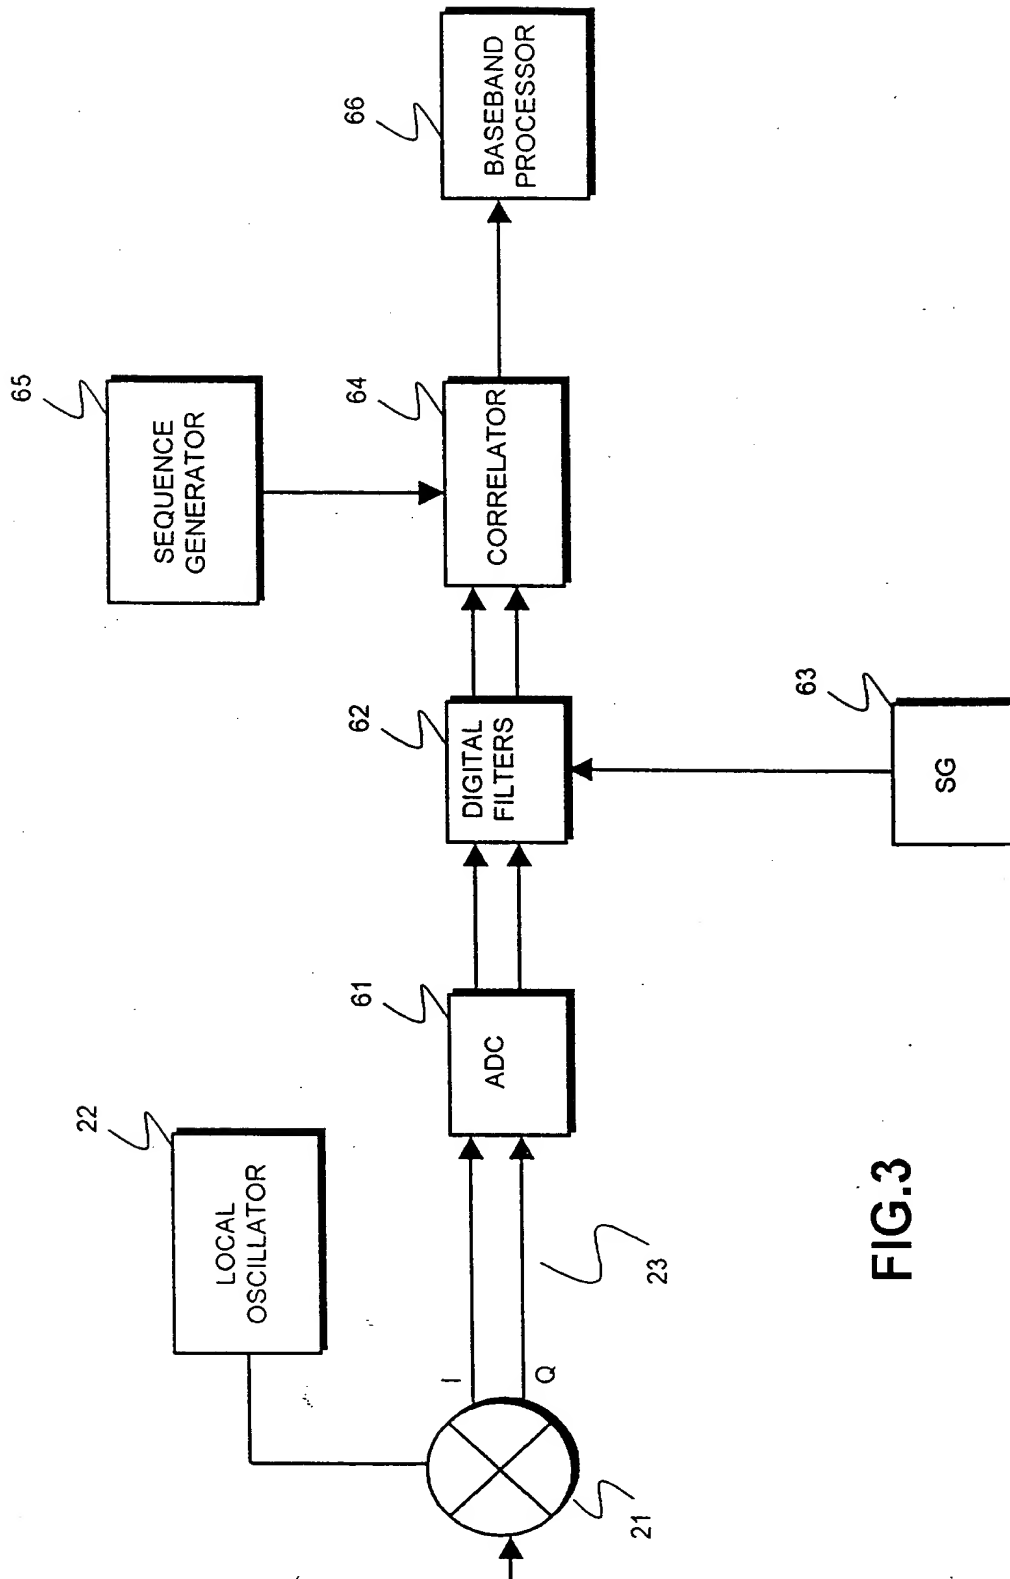


FIG.3

THIS PAGE BLANK (USPTO)